


OUTLINE OF DOG TO BE OPAQUE ON DECAL



DETAIL OF REAR TARGET LIGHT
SCALE: 1" = 4 INCHES

PAINTING DIRECTIONS

1. APPLY DECAL OF GREYHOUND DOG TO BACK OF GLASS.
 2. MASK OUT DOG & SANDBLAST ENTIRE BACK SIDE OF GLASS.
 3. REMOVE MASK & PAINT ENTIRE BACK SIDE WITH WHITE LACQUER.
 4. MASK OFF DOG & PAINT ENTIRE BACK SIDE RED (ARGO NO. 90-5073)
- "STOP SIGN"**
1. SANDBLAST ENTIRE BACK SIDE OF GLASS.
 2. PERMANENTLY MASK OFF LETTERS USING BLACK OPAQUE MATERIAL.
 3. APPLY COAT OF AMBER LACQUER OVER ENTIRE BACK SIDE.
- ALTERNATE:
1. USE AMBER GLASS & PERMANENTLY MASK OFF LETTERS USING BLACK OPAQUE MATERIAL.
- "GREYHOUND LINES"**
1. SANDBLAST ENTIRE BACK SIDE OF GLASS.
 2. MASK OFF LETTERS.
 3. PAINT REMAINING AREAS WITH WHITE LACQUER.
 4. REMOVE MASKING & PAINT MASKED AREA PERMANENT OPAQUE BLUE.
 5. APPLY COAT OF ARGO RED NO. 90-5073 OVER ENTIRE BACK SIDE.

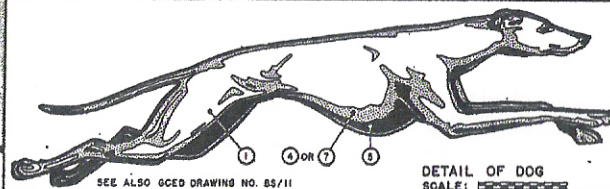

COLOR SCHEDULE

NO.	COLOR	SPECIFICATION
(1)	WHITE	ARGO PAINT NO. 135-1175
(2)	BLUE	" " " 503-2855
(3)	GOLD	" " " 503-200 WITH 384
(4)	GREY	" " " 503-40240
(5)	BLUE	" " " 503-50048
(6)	BLUE	BOOTH/LITE BLUE 180° ANGLE
(7)	SILVER	" " SILVER 180° ANGLE
(8)		
(9)		
(10)		
(11)		
(12)		

THE GREYHOUND CORPORATION
ENGINEERING DEPARTMENT

EXTERIOR PAINTING DIAGRAMS
MODEL: PD 37-4151 PDG-PGG 37-4101 SIMILAR
REVISED 4/11/47
DATE 5/24/47

Greyhound Lines

DETAIL OF LETTERING

SCALE: 1" = 8 INCHES